


液压压接钳 HYDRAULIC CRIMPING TOOLS

YQ-120A 快速液压钳

- 适用于输配电架空和地下电缆线钢铝端子、套管的压接。
- 采用六角型模具压接紧密、导电良好、不易脱落。
- It is applied to overhead distribution and press connection for copper terminals and sleeve of underground cable.
- Hexagonal mould is adopted to ensure tight press connection, good electric conduction and non-easy shedding.


工具参数	
应用范围 Range of application	10-120mm ² (铝端子 Al Terminal) 16-120mm ² (铜端子 Cu Terminal)
出力 Crimping force	8ton
行程 Stroke	13mm
模具配置 Standard	16,25,35,50,70,95,120mm ²
重量 Weight	4.8Kg
外箱包装尺寸 Packaging size	545x130x235mm
包装 Package	塑料箱 Plastic case

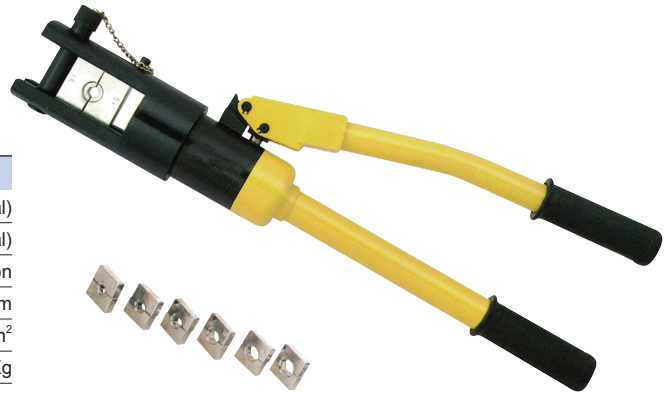

YQ-240A 快速液压钳

- 适用于输配电架空和地下电缆线钢铝端子、套管的压接。
- 采用六角型模具压接紧密、导电良好、不易脱落。
- It is applied to overhead distribution and press connection for copper terminals and sleeve of underground cable.
- Hexagonal mould is adopted to ensure tight press connection, good electric conduction and non-easy shedding.

工具参数	
应用范围 Range of application	10-185mm ² (铝端子 Al Terminal) 16-240mm ² (铜端子 Cu Terminal)
出力 Crimping force	8ton
行程 Stroke	16mm
模具配置 Standard	16,25,35,50,70,95,120,150,185,240mm ²
重量 Weight	4.8Kg
外箱包装尺寸 Packaging size	545x130x235mm
包装 Package	塑料箱 Plastic case

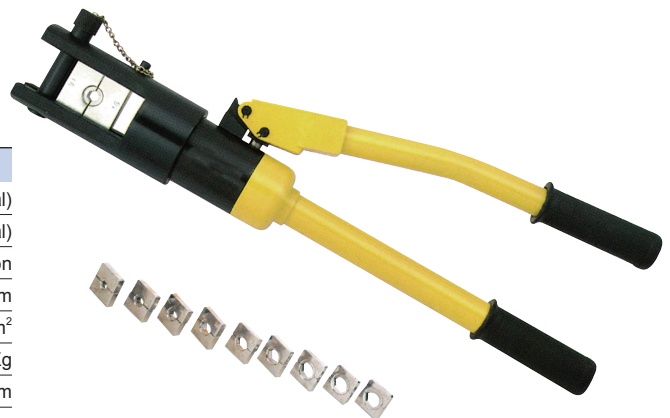

YQ-300A 快速液压钳

- 适用于输配电架空和地下电缆线钢铝端子、套管的压接。
- 采用六角型模具压接紧密、导电良好、不易脱落。
- It is applied to overhead distribution and press connection for copper terminals and sleeve of underground cable.
- Hexagonal mould is adopted to ensure tight press connection, good electric conduction and non-easy shedding.

工具参数	
应用范围 Range of application	10-185mm ² (铝端子 Al Terminal) 16-300mm ² (铜端子 Cu Terminal)
出力 Crimping force	8ton
行程 Stroke	16mm
模具配置 Standard	16,25,35,50,70,95,120,150,185,240,300mm ²
重量 Weight	6.4Kg
外箱包装尺寸 Packaging size	755x130x230mm
包装 Package	塑料箱 Plastic case

